


Breakout Junction Boxes

To simplify installation, maintenance and repair and increase the safety of the system, install EPG Breakout Junction Boxes between the pump station and control panel.

EPG Breakout Junction Boxes provide a simple and convenient way to disconnect power or sensor wires during maintenance and/or repair work. They also provide a gas-tight seal between your riser, well or sump and your control panel. Corrosive gases migrating through motor and sensor cable conduit to the controller is a major contributor to early control panel failure. Not only can these gases increase the chance for explosions, they also corrode contacts and make wires brittle. Give your system a break! Install an EPG Breakout Box close to the side slope riser or sump and then hardwire the breakout box to the controller.

EPG Breakout Junction Boxes - a break you need for optimum landfill operation!

- Seals off harmful gas migration (A)
- Equipped with FNPT waterproof exit hub
- Terminal strip to facilitate pump and sensor removal (B)
- Minimizes costs by running shorter motor or sensor cable (C)
- Available in a variety of configurations for one or more devices
- Weatherproof NEMA 4X enclosure with cord restraint, seal off and mounting hardware

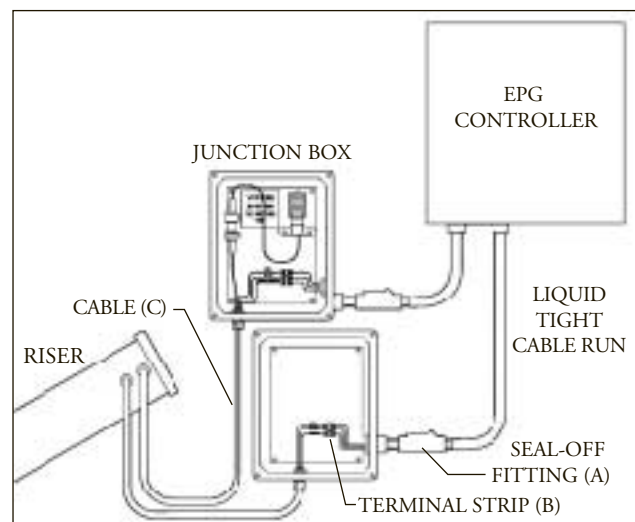

continued on back

MODEL NUMBERS AND DESCRIPTION

BJBD100	Leak Detection
BJBF400	Float
BJBF425	Two (2) Floats
BJBF440	Three (3) Floats
BJBF450	Four (4) Floats
BJBF460	Five (5) Floats
BJBF700	Flow Sensor
BJBF725	Two (2) Flow Sensors
BJBF750	Three (3) Flow Sensors
BJBS470	Four (4) Temperature Sensors
BJBL600B	Level Sensor*
BJBL600BT	Level Sensor* (Tank Gauging)
BJBL600BVA	Level Sensor* (Vacuum Application At Riser)
BJBL625B	Two (2) Level Sensors*
BJBO800B	Level Sensor & Flow Sensor*
BJBO800BT	Level Sensor & Float* (Tank Gauging)
BJBO815B	Level Sensor & Float*
BJBO825B	Two (2) Level & One (1) Flow Sensor*
BJBO850B	One (1) Level & Two (2) Flow Sensors*
BJBO900B	Two (2) Level & Two (2) Flow Sensors*

All Standard Models: NEMA 4X (Non-Metallic)

Also Available: NEMA 4X (Stainless Steel), NEMA 7/4 (Explosion-proof/weathertight)

* Each level sensor includes a desiccant dryer and bellows mounted inside the enclosure.

continued on next page

continued from previous page.

MODEL NUMBERS AND DESCRIPTION

BJBO905B	Level Sensor, Flow Sensor & Leak Detection Sensor*
BJBO925B	Two (2) Level & Two (2) Leak Detection Sensors*
BJBP300	Two (2) Probes
BJBP315	Three (3) Probes
BJBP325	Four (4) Probes
BJBP500	Motor Lead (14 to 10 AWG)
BJBP500KSB	Motor Lead (KSB Motor)
BJBP500SP	Motor Lead (Large Cables)
BJBP525	Two (2) Motor Leads (14 to 10 AWG)
BJBP550	Three (3) Motor Leads (14 to 10 AWG)

All Standard Models: NEMA 4X (Non-Metallic)

Also Available: NEMA 4X (Stainless Steel), NEMA 7/4 (Explosion-proof/weathertight)

* Each level sensor includes a desiccant dryer and bellows mounted inside the enclosure.